

CAVIUS

PRODUCT NAME: CAVIUS RF MAINS POWERED SMOKE ALARM, 97MM

PRODUCT NUMBER: CV2208

WIRELESS
ALARM FAMILY
SMOKE
ALARM



MAINS
POWERED



DANISH
DESIGN



100%
TESTED



WIRELESS
ALARM FAMILY



MAINS
POWERED
SMOKE





CAVIUS

PRODUCT NAME: CAVIUS RF MAINS POWERED SMOKE ALARM, 97MM **PRODUCT NUMBER:** CV2208

PRODUCT DATA:

DEVICE TYPE:

Mains powered smoke alarm device with wireless interlink and battery back-up.

USAGE:

Designed for installation in private homes. The alarm can be mounted on top of a conduit box or on the ceiling with the enclosed base.

This alarm can be connected with other alarms from the CAVIUS Wireless alarm family or function as a stand alone alarm. Top cover designed for easy access vacuum cleaner nozzle.

INSTALLATION POSITION:

Ceiling. Set of 2 x screws, 2 x plugs and ceiling base included.

PRODUCT DIMENSIONS:

D: 97 mm x H: 52 mm

PRODUCT WEIGHT:

Base alarm weight (excluding screws, plugs and mounting ring): 200g.

OPERATION AC/DC:

230V AC

BATTERY TYPE:

CR2 back up battery (non-replaceable).

BATTERY LIFE:

Minimum 10 years life of back up battery (1 year without power supply).

LOW BATTERY INDICATION:

A short acoustic "beep" will sound and LED flash every 48 seconds when the voltage is below 2.85V. In this stage it will continue for minimum 30 days, and can drive the alarm for 4 minutes.

INTERLINK FREQUENCY:

868 MHZ

SIGNALS:

Transmits RF signals to the CAVIUS Wireless Family at alarm.

NORMAL OPERATION:

Red LED flashes every 48 second for normal operation. Green LED shows mains power on.

INTERLINK RANGE:

Minimum 100m in open field. Range depends on the building materials and will need to be tested in each individual case.

SOUND:

Audible indicator min. 85 dB @ 3 meter.

SOUND PATTERN:

Fire alarm condition is indicated by a series of three successive tones.

VISIBLE INDICATORS:

A red LED is used to indicate the following conditions:

- fire alarm condition is indicated by a flash every 0.5 second
- smoke sense speed up is indicated by a flash every 2 seconds when the smoke level is at the alarm threshold
- normal operation is indicated by a flash every 48 seconds
- a green LED is used to show the alarm is powered by mains supply

PUSH BUTTON:

The smoke alarm includes a push button switch built into the top of the alarm for easy access. This button has the following functions:

- set up - press the button to start sending out a specific house code to the others alarms

- hush – during an alarm condition this immediately silences the alarm when pressed. When the button is released, the alarm remains silenced for 10 minutes
- test – when not in alarm the sounder can be activated to provide a sensor OK test function. While the button is pressed, the audible and visible indicators are activated if the sensor is OK

DETECTION TIMING:

The smoke detector is reading every 8 seconds, every 2 seconds at unusual readings (alarm stage).

WARRANTY:

10 year

CERTIFICATION:

EN 14604:2005+AC:2008

OPERATING TEMPERATURE:

+4°C to +38°C

OPERATING HUMIDITY:

Up to 90% RH non-condensing

STORAGE TEMPERATURE:

-20°C to +60°C

STORAGE HUMIDITY:

Up to 93% RH non-condensing

CONTACT


www.cavius.com

MANUFACTURER

Carrier Fire & Security Danmark A/S

CAVIUS

WIRELESS
ALARM FAMILY

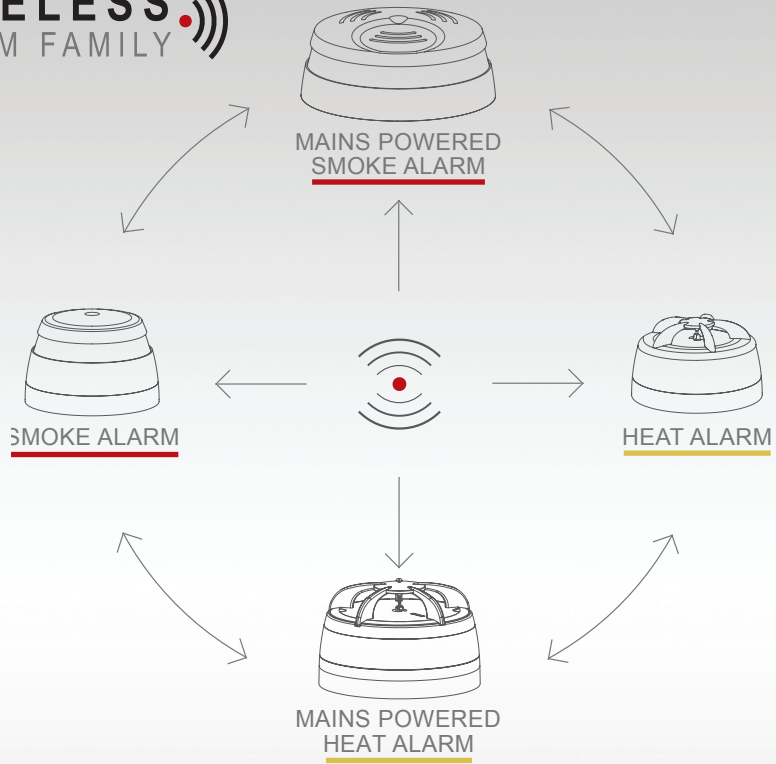

Diameter: 97 mm

PRODUCT NAME: CAVIUS RF MAINS POWERED SMOKE ALARM, 97MM

PRODUCT NUMBER: CVZ2208